

SUBMERSIBLE PUMPS


Drainage Pump

FEATURES

- All stainless steel body
- 600W Motor
- Carrying handle
- Outlet fitting
- 10 metre cable and plug
- Maximum particle size 5 mm
- Mechanical seal
- Float controlled automatic stop and start

12
MONTHS
PUMP WARRANTY

Performance Curve BIA-JH60068

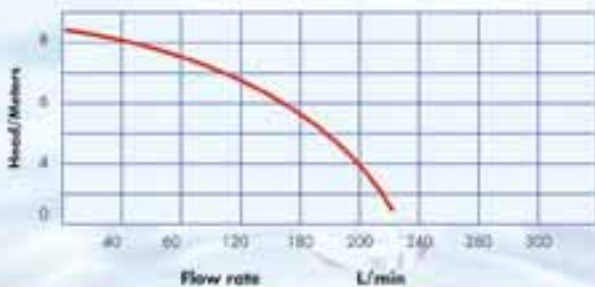

BIA-JH60068

Available early September 2009

Drainage Pump with Internal Float Switch (clean water)

FEATURES

- Light and compact
- Submersible Drainage Pump for clean water
- Ideal for pits in confined spaces where floats do not work
- Internal float switch
- When switched to manual mode, the scavenger type hose allows pumping down to 5mm
- Not suitable for construction sites, ponds, fountains or biotreatment
- Incorporates on/off switch for manual and automatic level control



BIA-JH40011

12
MONTHS
PUMP WARRANTY

High Head Drainage Pump (clean water)

FEATURES

- Supplied complete with 10 metres of electrical cable
- High Head Pump for rainwater tanks and clean water only
- High Head, flows to 83 L/min
- Corrosion resistant body
- Fully automatic operation
- Silicon Carbide Mechanical Seal
- Motor with built in auto reset thermal overload
- Dimensions: 164 x 150 x 337mm



BIA-JH8003P

12
MONTHS
PUMP WARRANTY

Model / Part No	Body Material	Max Granule size	Max Flow (lph)	Flow at 2m	Flow at 4m	Flow at 6m	Max Height	Rated Power	Cable Length	Discharge Outlet Size (Multiple)	RRP (inc 10% GST)
BIA-JH60068	Stainless Steel	5mm	15000	13500	11520	8100	8.5m	600W	10M	1" 1/4" 1 1/2"	\$
BIA-JH40011	Plastic	5mm	7500	5000	5200	3050	8m	400W	10m	1" 1/4" 1 1/2"	\$
BIA-JH8003P	Stainless Steel	0.5mm	4980	4200	3000	2100	30m	800W	10m	1" 1/4" 1 1/2"	\$

Disclaimer: Every effort has been made to publish the correct details in this brochure. No responsibility will be taken for errors, omissions or changes in product specifications.

Proudly supplied by:

p: 1300 235 110 or m: 0400 000 778

Direct order fax: 1300 889 386 e: info@artesianrainwatertank.com.au



Drainage Pumps

FEATURES

- Simple installation
- Instructions included
- Light and compact
- Fully automatic operation
- Great value for money
- Supplied complete with 10 metres of electric cable
- Not suitable for construction sites, ponds, fountains or biotreatment.



BIA-JH400

BIA-JH550

BIA-JH900

Model / Part No	Body Material	Max Ganule size	Max Flow (lph)	Flow at 2m	Flow at 4m	Flow at 6m	Max Height	Rated Power	Cable Length	Discharge Outlet Size (Multiple)	RRP (inc 10% GST)
BIA-JH400	Plastic	5mm	7500	6600	4500	2700	8m	400W	10m	1" 1/4" 1 1/2"	\$
BIA-JH550	Stainless Steel	5mm	9000	8300	5700	2400	7.5m	550W	10m	1" 1/4"	\$
BIA-JH900	Plastic	5mm	13500	12600	10500	6600	9m	900W	10m	1" 1/4" 1 1/2"	\$

Vortex Pumps

FEATURES

- Simple installation
- Instructions included
- Light and compact
- Fully automatic operation
- Great value for money
- Handle soft solids up to 35mm in size
- Supplied complete with 10 metres of electric cable
- Not suitable for construction sites, ponds, fountains or biotreatment



BIA-JH550B

BIA-JH750B

Model / Part No	Body Material	Max Ganule size	Max Flow (lph)	Flow at 2m	Flow at 4m	Flow at 6m	Max Height	Rated Power	Cable Length	Discharge Outlet Size (Multiple)	RRP (inc 10% GST)
BIA-JH550B	Plastic	35mm	9500	8500	5400	2700	7m	550W	10m	1" 1/4" 1 1/2"	\$
BIA-JH750B	Stainless Steel	35mm	12500	11100	7800	4500	8m	750W	10m	1" 1/4" 1 1/2"	\$

Disclaimer: Every effort has been made to publish the correct details in this brochure. No responsibility will be taken for errors, omissions or changes in product specifications.

Proudly supplied by:

p: 1300 235 110 or m: 0400 000 778

Direct order fax: 1300 889 386 e: info@artesian tanks.com.au

